



TYPICAL PROPERTIES

| | |
|-------------------------------|----------------------------|
| Kinematic Viscosity, @ 100°C | 10.8 cSt |
| Kinematic Viscosity, @ 40°C | 75.0 cSt |
| Viscosity Index | 131 |
| Cold Crank Simulator, @ -20°C | 6,500cP |
| Pour Point | -45°C |
| Flash Point, COC | 219°C |
| Total Base Number (TBN) | 10.8 mgKOH.g ⁻¹ |
| Density, @ 15°C | 0.885 g/cm ³ |

Values are typical of current production, and whilst future production will meet these specifications, some variation in typical data may occur.

HyperDrive KX+

15W-30 Super Universal Tractor Oil

CODE: KXEE10

HyperDrive KX+ 15W-30 Super Universal Tractor Oil is a high quality, multi-functional oil for use in tractors, agricultural machines and off highway vehicles where a single oil is recommended for engine, transmission and hydraulic applications. Formulated with high quality base oils and premium multi-functional additives, this one oil can protect engine, transmission, final drive, and hydraulic systems including wet brakes. Suitable for year-round use, this product protects equipment whilst reducing inventory and complexity.

FEATURES / BENEFITS

- Universal tractor oil, suitable for agricultural and off-highway vehicles where a single oil can be used for engine, transmission and hydraulic systems, reducing inventory and minimising the risk of incorrect lubricant application
- Formulated with high quality base oil, this multigrade oil is suitable for use across a wide temperature range, ensuring protection at both low temperature start-up and during high temperature operations
- Formulated to protect naturally aspirated or turbocharged diesel and petrol engines from wear, corrosion and deposits, maintaining engine condition and extending equipment life
- Premium additive package gives wear and frictional control, maintaining manual transmission gearboxes and final drive condition, reducing downtime, and minimising wet brake noise or "squawk"
- Good hydraulic performance protects pumps and other components from wear and corrosion, maintaining performance and ensuring consistent, smooth operations of hydraulic systems

PERFORMANCE SPECIFICATIONS


HyperDrive KX+ 15W-30 Super Universal Tractor Oil meets the requirements of:

- API: GL-4
- Allison: C-4
- John Deere: J20D / J20C
- Massey Ferguson: M1145
- SPERRY VICKERS: M2950S
- ZF: TE-ML 06B, 06C, 07B

HyperDrive KX+ 15W-30 Super Universal Tractor Oil is suitable for use where the following specifications are required:

- API: CG-4/SF
- CASE INTERNATIONAL: MS-1204, MS-1206
- CATERPILLAR: TO-2
- CNH MAT: 3525
- FORD: M2C-86C, M2C-86B, M2C-134D, M2C-159B, M2C-159C
- FORD NEW HOLLAND: 8200902
- MASSEY FERGUSON: M1135, M1139, M1143, M1144,
- MB: 227.1
- SPERRY VICKERS: I-280-S

AVAILABILITY

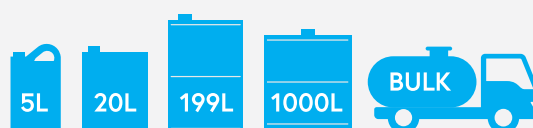

Hyperdrive, 47 Heming Road, Redditch, B98 0EA
Tel: 0800 371 910 hyperdrivelubricants.com